

KM10T Hydrogel

unique features include...

- **Our strongest skin adhesion gel**
- **Ideally suited for TENS or other muscle stimulation applications**
- **Suitable for use with silver inks, and conductive carbon substrates**

Product Specifications


Property/Test Method	Typical Values
Hydrogel Process pH	6.3 (± 0.5)
Biocompatibility (ISO 10993)	Pass
Volume Resistivity (Ohm-in)	763 Ohm-in
Stainless Steel Adhesion (grams per inch of width)	787 grams
Top Liner Adhesion (grams per inch of width)	131 grams
Bottom Liner Adhesion (grams per inch of width)	125 grams
Thickness of Hydrogel	32 mils (± 5 mils)
Roll Dimensions	Width: 9" or 6.5" widths (usable gel) Length: 350' (approximate)
Top Release Liner	2.5 mil, MDPE
Bottom Release Liner	5 mil, Polyester
Shelf Life	Process within 12 months*




Master Roll Information

Roll Length: 350 ft. $\pm 2\%$


9.00" Wide Master Roll	37.8 MSI
6.50" Wide Master Roll	27.3 MSI
1 MSI = 1,000 Square Inches	

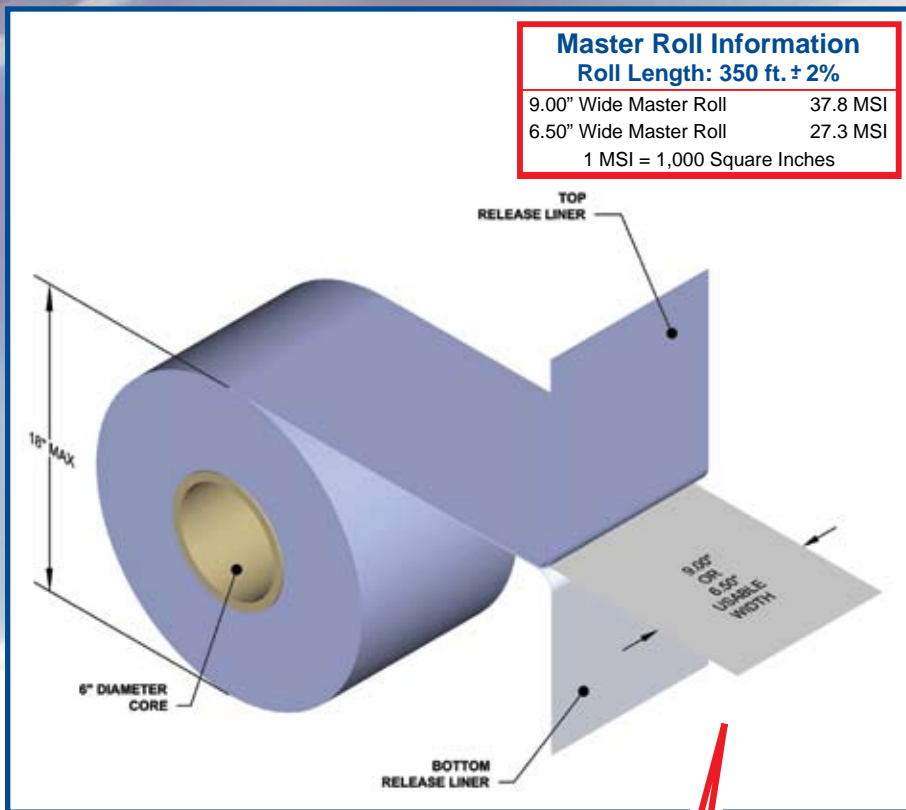

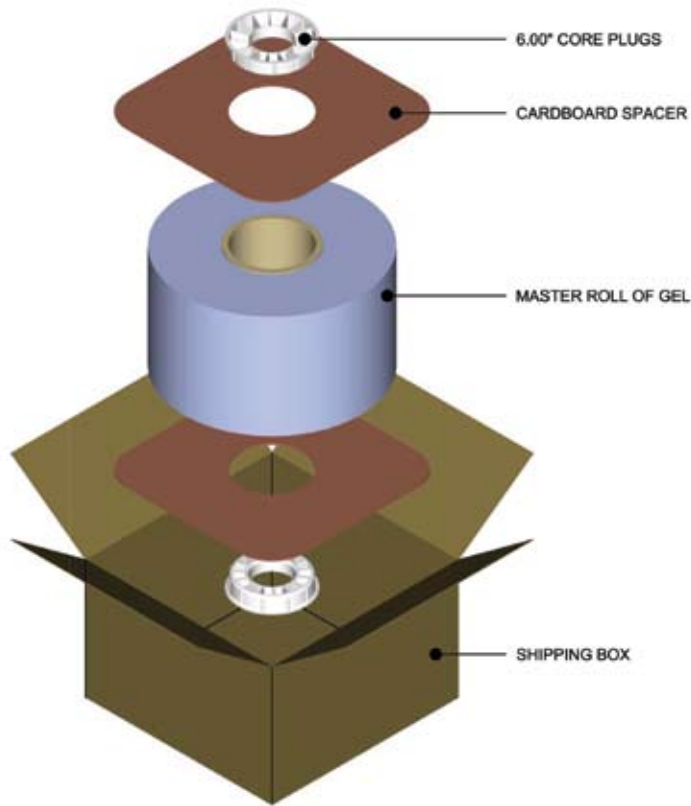

Box weight: Approximately 75 lbs

Master Roll Detail

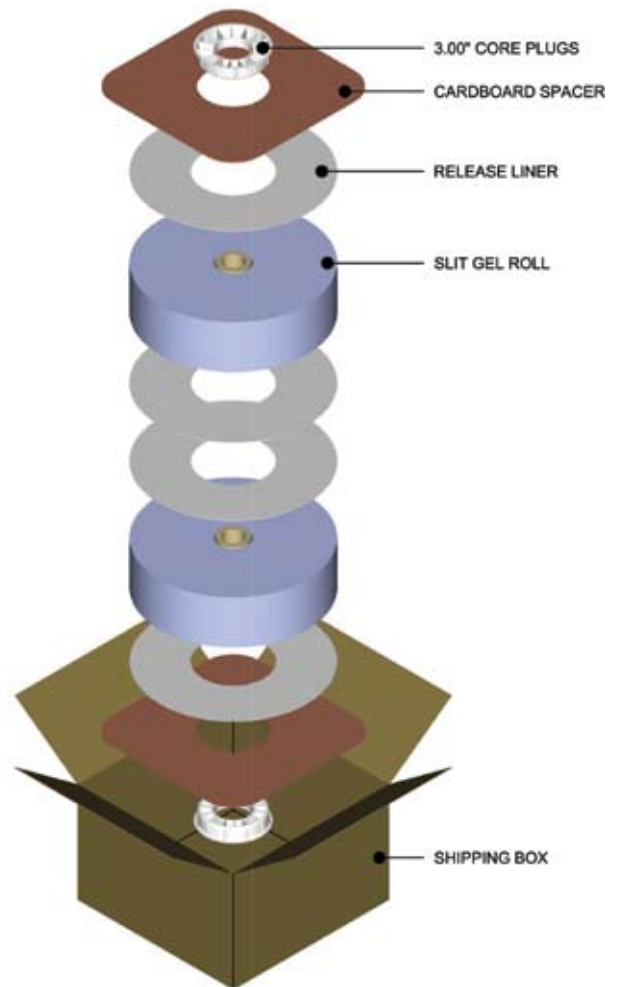

Box weight: Approximately 75 lbs

Slit Roll Detail

*Shelf Life is for the hydrogel prior to conversion stored in the original packaging at ambient temperature.

Buyer is responsible for determining the suitability of the hydrogel for a particular application.